





GA Series

Outdoor LED Panel


Features

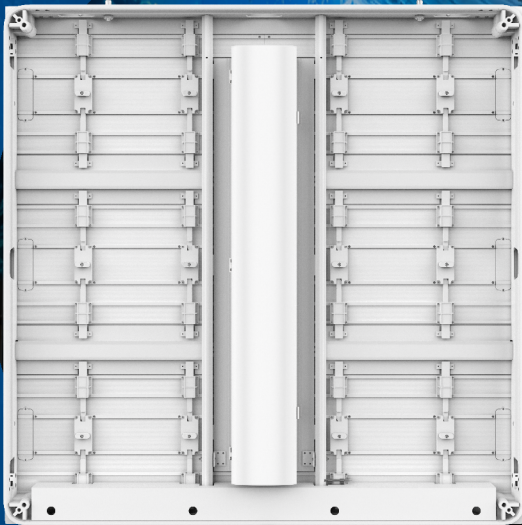

- 01** Aluminum module back cover instead of PC for superior heat dissipation and longer lifespan

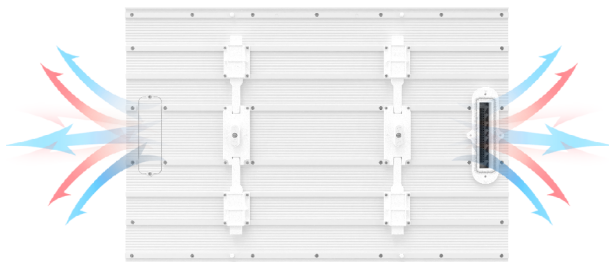

- 02** Patented soft 90° curve panel design for outdoor naked-eye 3D applications

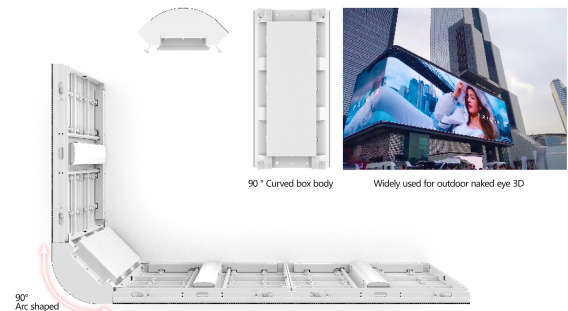

- 03** Fully enclosed module design offering a high level of protection against all outdoor weather conditions




- 04** 100% front-maintenance design, suitable for wall mounting and double-sided outdoor displays



Features




05 Universal panel design for all pixel pitches

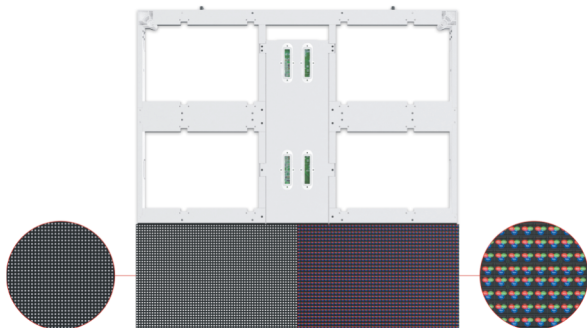

06 Easy front and rear serviceability



07 Smart module design supports calibration coefficient storage, temperature and voltage monitoring, and accurate fault-point detection through port signal analysis

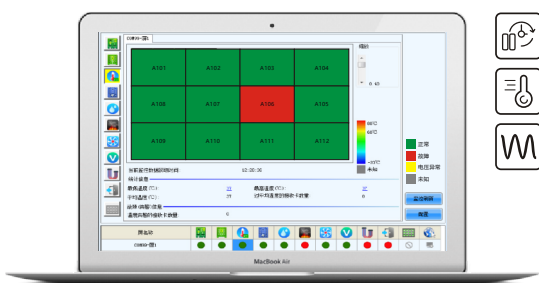

08 Ultra-high brightness: 10,000 nits




Specifications

Product	P4	P6.67	P8	P10	P10
Pixel Pitch	4mm	6.67mm	8mm	10mm	10mm
LED Configuration	SMD1921	SMD2727	SMD2727	SMD2727	DIP346
LED Encapsulation Technology	SMD	SMD	SMD	SMD	DIP
Brightness (After Calibration)	8000nits	10000nits	10000nits	10000nits	10000nits
Scan Rate	1/8	1/6	1/4	1/2	1/4
Refresh Rate (Hz)	3840Hz				
Panel Dimension	37.8" × 37.8" × 3" (960mm × 960mm × 78mm)				
Panel Weight	66 lbs (30 kg)	64.9 lbs (29.5 kg)	64.9 lbs (29.5 kg)	64.9 lbs (29.5 kg)	85.3 lbs (38.8 kg)
Panel Resolution (Pixel)	240×240	144×144	120×120	96×96	96×96
Module Size	18.9" × 12.6" (480 × 320mm)				
Panel Frame Material	Profile Aluminum				
IP Rating	Outdoor (IP65)				
Serviceability	Full Front & Full Rear				
Curving Lock (Optional)	N/A				
Power Consumption (Max)	680W	680W	680W	680W	320W
Power Consumption (Average)	340W	340W	340W	340W	160W
Maximum Hanging (Panels)	N/A				
Maximum Ground Stacking (Panels)	N/A				
Grey Scale	14bit				
Viewing Angle	H160°, V140°	H140°, V140°	H140°, V140°	H140°, V140°	H100°, V50°
Input Voltage	Wide Range 100~240VAC				
Working Temperature	- 22°F to +158°F				
Working Humidity	10%-90%RH				
Color Temperature	6500-9500K				

Notes: Specifications are provided for reference only. Actual values may vary.

Dimensions

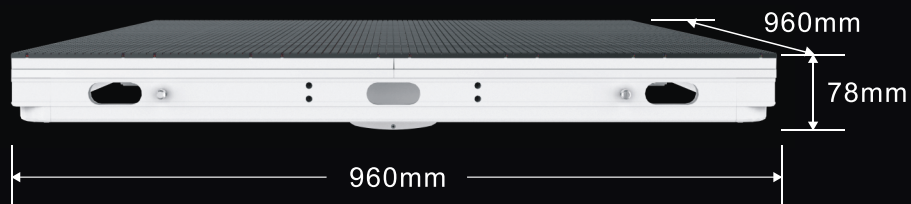

☎ : www.gcled-usa.com

☎ : (469) 686-1719

✉ : info@gcled-usa.com

📍 : 16518 Westgrove Drive
Addison, TX 75001