



# Gposter Series

Indoor LED Panel



Exhibit  
Hall A

Meeting  
Rooms →

Exhibit  
Hall B ↑

Food  
Court →

# SEMINAR SCHEDULE



10:00 AM – 10:45 AM

**AI-POWERED  
INNOVATION**



11:00 AM – 11:45 AM

**THE FUTURE OF  
CONNECTIVITY**



12:00 PM – 12:45 PM

**CYBERSECURITY  
IN A DIGITAL  
WORLD**



1:30 PM – 2:15 PM

**SMART BUILDINGS  
& IOT SOLUTIONS**



2:30 PM – 3:15 PM

**SUSTAINABLE TECH  
FOR TOMORROW**



# Features

## AGENDA

Building Smarter  
Connections for  
Tomorrow



9:00 AM – 9:30 AM

**Welcome & Opening Remarks**  
Sarah Johnson, CEO



9:30 AM – 10:30 AM

**The Future of Intelligent Connectivity**  
Michael Lee, CTO



10:45 AM – 11:45 AM

**Driving Innovation Through Data**  
Emily Chen, Head of Data Strategy



11:45 AM – 1:00 PM

**Lunch & Networking**



1:00 PM – 2:00 PM

**Cybersecurity in a Connected World**  
David Martinez, CISO



2:15 PM – 3:15 PM

**Cloud. AI. IoT. The Power of Integration**  
Jessica Park, VP of Solutions



3:30 PM – 4:30 PM

**Roadmap to a Smarter Future**  
Panel Discussion




4:30 PM – 5:00 PM

**Q&A & Closing Remarks**

01

Foldable for easy setup and efficient storage

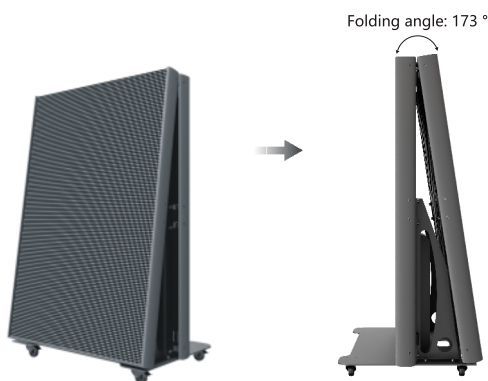

02

Unique road case design with ramp, allowing a single person to easily move the product in and out of the case



03

Foldable bezel with magnetic hinges, eliminating the need for screws



04

Three different heights available






# Features



## 05 Seamless connection between multiple units



## 06 Glue-on-board (GOB) for extra durability

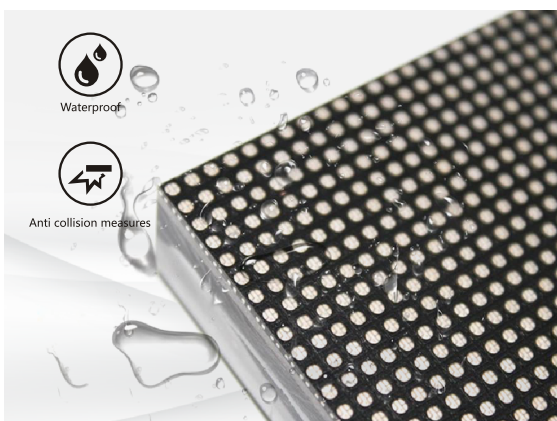

## 07 Three different heights available



Windows



Android



iOS





# Features



08

100% front-maintenance panel design, can be repurposed for wall-mounted display applications.





# Specifications of Gposter-192

|                                  |                                               |          |          |
|----------------------------------|-----------------------------------------------|----------|----------|
| Product                          | P1.25                                         | P1.538   | P1.86    |
| Pixel Pitch                      | 1.25mm                                        | 1.538mm  | 1.86mm   |
| LED Configuration                | SMD1010                                       | SMD1212  | SMD1515  |
| LED Encapsulation Technology     | GOB                                           |          |          |
| Brightness (After Calibration)   | 600 nits                                      | 800 nits | 800 nits |
| Scan Rate                        | 1/64                                          | 1/52     | 1/43     |
| Refresh Rate (Hz)                | 3840 Hz                                       | 7680 Hz  | 7680 Hz  |
| LED Display Dimension            | 25.2" × 75.6" × 1.77" (640mm × 1920mm × 45mm) |          |          |
| Total Panel Dimension            | 25.8" × 76.2" × 1.77" (655mm × 1936mm × 45mm) |          |          |
| Panel Weight                     | 99 lbs (45 kg)                                |          |          |
| Panel Resolution (Pixel)         | 512×1536                                      | 416×1248 | 344×1032 |
| Module Size                      | 12.6" × 6.3" (320 × 160mm)                    |          |          |
| Panel Frame Material             | Die-casting Aluminum                          |          |          |
| IP Rating                        | Indoor (IP34)                                 |          |          |
| Serviceability                   | Full Front                                    |          |          |
| Curving Lock (Optional)          | N/A                                           |          |          |
| Power Consumption (Max)          | 500 watts                                     |          |          |
| Power Consumption (Average)      | 250 watts                                     |          |          |
| Maximum Hanging (Panels)         | N/A                                           |          |          |
| Maximum Ground Stacking (Panels) | N/A                                           |          |          |
| Grey Scale                       | 16bit                                         |          |          |
| Viewing Angle                    | H160°, V160°                                  |          |          |
| Input Voltage                    | Wide Range 100~240VAC                         |          |          |
| Working Temperature              | - 22°F to +149°F                              |          |          |
| Working Humidity                 | 10%-90%RH                                     |          |          |
| Color Temperature                | 6500-9500K                                    |          |          |

Notes: Specifications are provided for reference only. Actual values may vary.

## Dimensions






# Specifications of Gposter-240

|                                  |                                               |          |          |
|----------------------------------|-----------------------------------------------|----------|----------|
| Product                          | P1.25                                         | P1.538   | P1.86    |
| Pixel Pitch                      | 1.25mm                                        | 1.538mm  | 1.86mm   |
| LED Configuration                | SMD1010                                       | SMD1212  | SMD1515  |
| LED Encapsulation Technology     | GOB                                           |          |          |
| Brightness (After Calibration)   | 600 nits                                      | 800 nits | 800 nits |
| Scan Rate                        | 1/64                                          | 1/52     | 1/43     |
| Refresh Rate (Hz)                | 3840 Hz                                       | 7680 Hz  | 7680 Hz  |
| LED Display Dimension            | 25.2" × 94.5" × 1.77" (640mm × 2400mm × 45mm) |          |          |
| Total Panel Dimension            | 25.8" × 94.5" × 1.77" (655mm × 2416mm × 45mm) |          |          |
| Panel Weight                     | 121 lbs (55 kg)                               |          |          |
| Panel Resolution (Pixel)         | 512×1920                                      | 416×1560 | 344×1290 |
| Module Size                      | 12.6" × 6.3" (320 × 160mm)                    |          |          |
| Panel Frame Material             | Die-casting Aluminum                          |          |          |
| IP Rating                        | Indoor (IP34)                                 |          |          |
| Serviceability                   | Full Front                                    |          |          |
| Curving Lock (Optional)          | N/A                                           |          |          |
| Power Consumption (Max)          | 625 watts                                     |          |          |
| Power Consumption (Average)      | 312 watts                                     |          |          |
| Maximum Hanging (Panels)         | N/A                                           |          |          |
| Maximum Ground Stacking (Panels) | N/A                                           |          |          |
| Grey Scale                       | 16bit                                         |          |          |
| Viewing Angle                    | H160°, V160°                                  |          |          |
| Input Voltage                    | Wide Range 100~240VAC                         |          |          |
| Working Temperature              | - 22°F to +149°F                              |          |          |
| Working Humidity                 | 10%-90%RH                                     |          |          |
| Color Temperature                | 6500-9500K                                    |          |          |

Notes: Specifications are provided for reference only. Actual values may vary.

## Dimensions

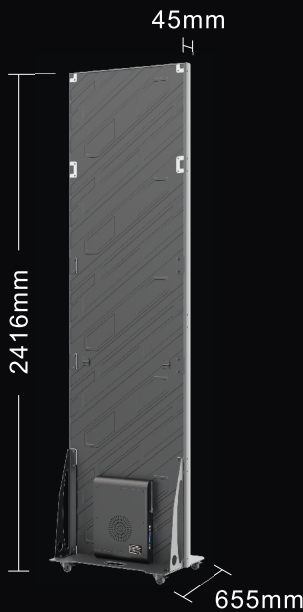



# Specifications of Gposter-288

|                                  |                                                |          |          |
|----------------------------------|------------------------------------------------|----------|----------|
| Product                          | P1.25                                          | P1.538   | P1.86    |
| Pixel Pitch                      | 1.25mm                                         | 1.538mm  | 1.86mm   |
| LED Configuration                | SMD1010                                        | SMD1212  | SMD1515  |
| LED Encapsulation Technology     | GOB                                            |          |          |
| Brightness (After Calibration)   | 600 nits                                       | 800 nits | 800 nits |
| Scan Rate                        | 1/64                                           | 1/52     | 1/43     |
| Refresh Rate (Hz)                | 3840 Hz                                        | 7680 Hz  | 7680 Hz  |
| LED Display Dimension            | 25.2" × 113.4" × 1.77" (640mm × 2880mm × 45mm) |          |          |
| Total Panel Dimension            | 25.8" × 114" × 1.77" (655mm × 2896mm × 45mm)   |          |          |
| Panel Weight                     | 149 lbs (67.7 kg)                              |          |          |
| Panel Resolution (Pixel)         | 512×2304                                       | 416×1873 | 344×1548 |
| Module Size                      | 12.6" × 6.3" (320 × 160mm)                     |          |          |
| Panel Frame Material             | Die-casting Aluminum                           |          |          |
| IP Rating                        | Indoor (IP34)                                  |          |          |
| Serviceability                   | Full Front                                     |          |          |
| Curving Lock (Optional)          | N/A                                            |          |          |
| Power Consumption (Max)          | 750 watts                                      |          |          |
| Power Consumption (Average)      | 375 watts                                      |          |          |
| Maximum Hanging (Panels)         | N/A                                            |          |          |
| Maximum Ground Stacking (Panels) | N/A                                            |          |          |
| Grey Scale                       | 16bit                                          |          |          |
| Viewing Angle                    | H160°, V160°                                   |          |          |
| Input Voltage                    | Wide Range 100~240VAC                          |          |          |
| Working Temperature              | - 22°F to +149°F                               |          |          |
| Working Humidity                 | 10%-90%RH                                      |          |          |
| Color Temperature                | 6500-9500K                                     |          |          |

Notes: Specifications are provided for reference only. Actual values may vary.

## Dimensions



🌐 : [www.gcled-usa.com](http://www.gcled-usa.com)

☎ : (469) 686-1719

✉ : [info@gcled-usa.com](mailto:info@gcled-usa.com)

📍 : 16518 Westgrove Drive  
Addison, TX 75001